

Dieter's Nixie Tube Data Archive

This file is a part of Dieter's Nixie- and display tubes data archive

If you have more datasheets, articles, books, pictures or other information about Nixie tubes or other display devices please let me know.

Thank you!

Document in this file	ETL datasheet: GR10G tube
Display devices in this document	GR10G

*DIGITRON-10 Digit Side-Viewing Cold-Cathode Numerical Register Tube

GR10G

Limit Ratings

Maximum cathode current	9 mA
Minimum voltage necessary to ensure breakdown	220 V

Characteristics

Nominal running voltage	180 V
A cathode left floating will assume some potential between that of the anode and the glowing cathode.	

Recommended Operating Conditions

Under the recommended D.C. operating conditions with the characters switched sequentially every 24 hours, an average life of 5,000 hours can be expected.

D.C. operation

Anode supply voltage — $R_a = 10k\Omega$	250 V
------------------------------------------	-------

A.C. operation

(Unsmoothed half-wave rectified 50 c.p.s. A.C.)

Anode supply voltage — $R_a = 12k\Omega$	200-220 V r.m.s.
$R_a = 18k\Omega$	220-250 V r.m.s.

Cathode 1 equalizing resistor	8.2k Ω
-------------------------------	---------------

Cathode 7 equalizing resistor	4.7k Ω
-------------------------------	---------------

* Registered Trade Mark




DIGITRON-10 Digit Side-Viewing Cold-Cathode Numerical Register Tube

Mechanical Data

Mounting position
Base
Socket

Any
B26A
B17, B26A or B27A



Base Connections
(underside view)



FRONT


- Pin 1 Cathode 6
- 2 Cathode 5
- 5 Cathode 4
- 6 Anode
- 7 Cathode 3
- 9 Cathode 2
- 10 Cathode 1
- 14 Cathode 0
- 15 Cathode 9
- 16 Cathode 8
- 17 Cathode 7

Note—All other pins are to be left unconnected.

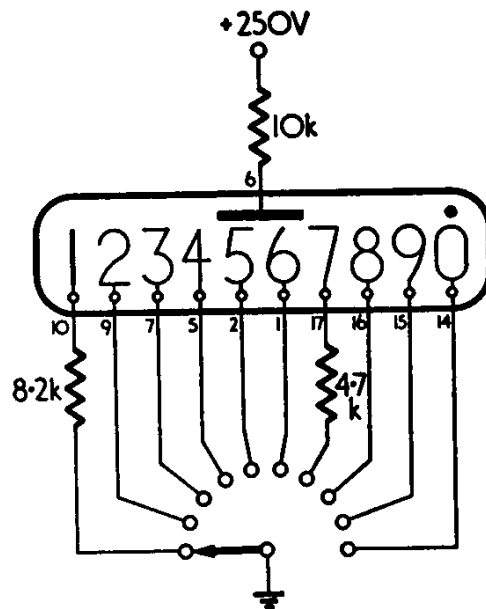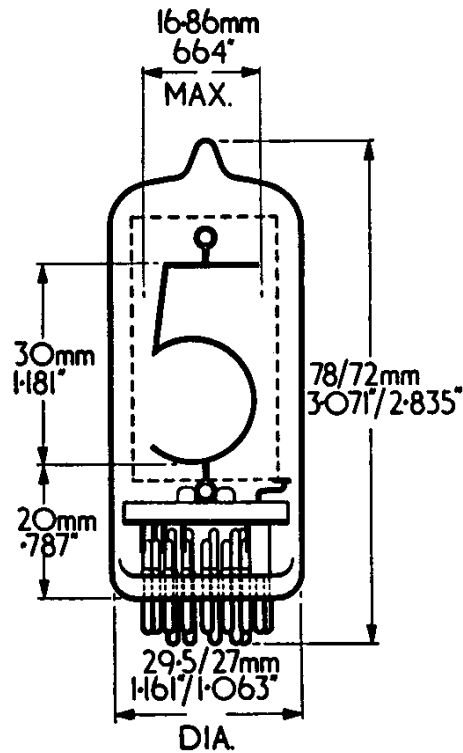

*DIGITRON — 10 Digit Side-Viewing Cold-Cathode Numerical Register Tube

GR10G

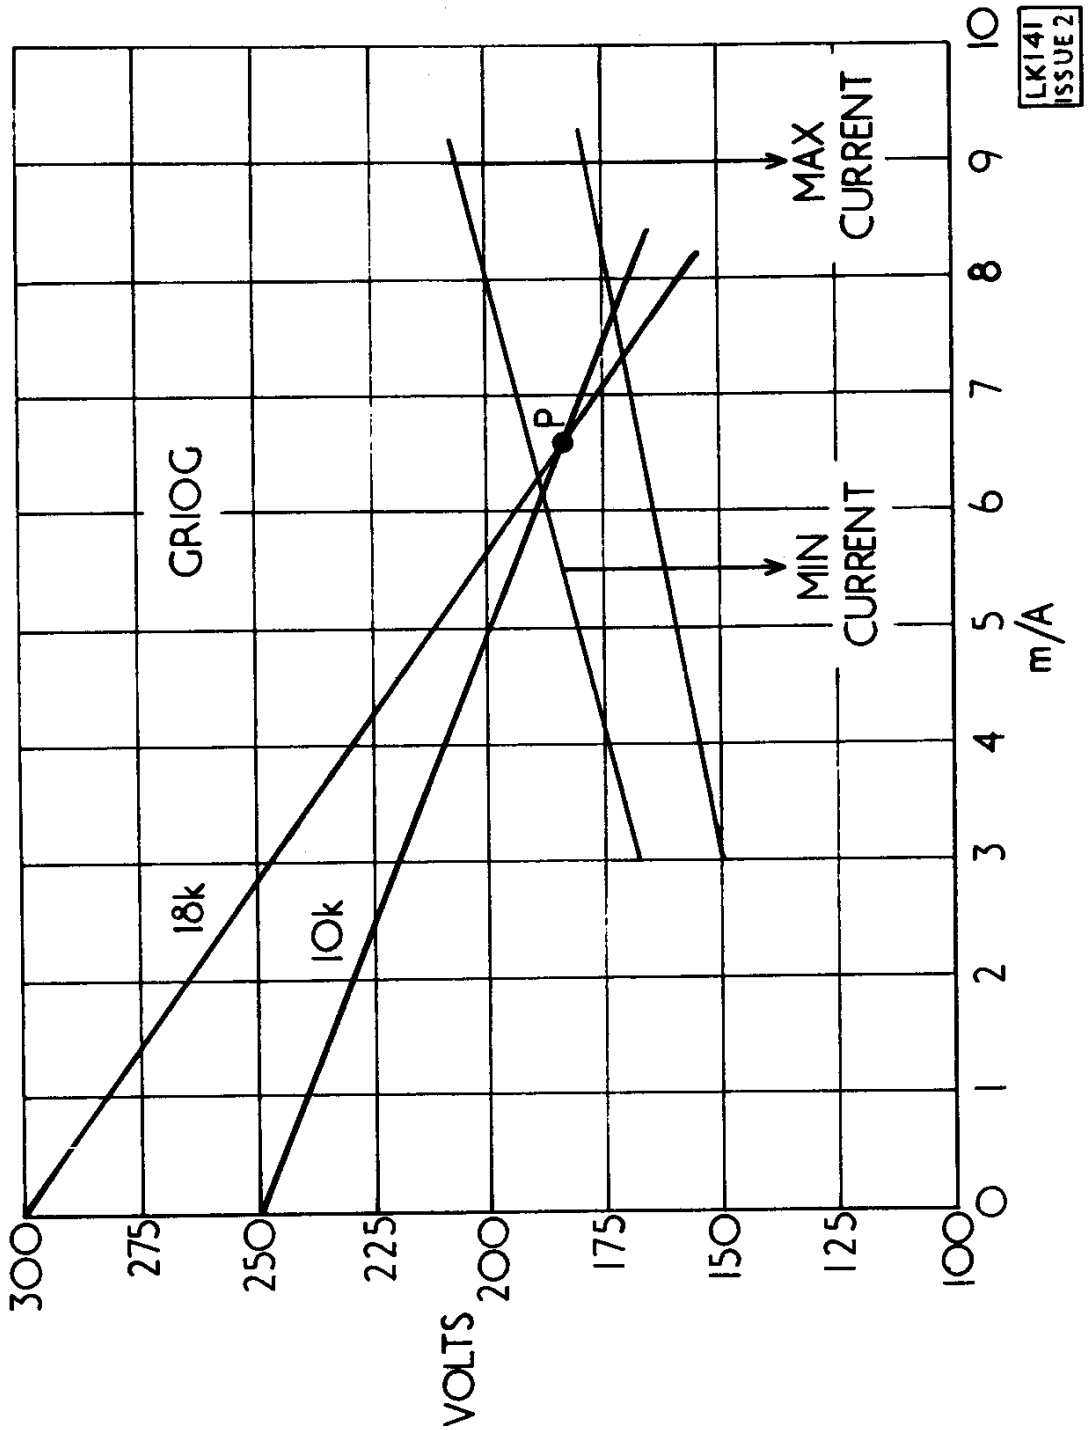

LK141
ISSUE 2

Operating Characteristics

*Registered Trade Mark

